



RMT

Application




RMT room thermostats are suitable for the control of heating, ventilation and air conditioning systems.

The range includes models for use in 24V systems - types RMT 24, RMT 24T and RMT 24R, plus models for use in 220/240V systems - types RMT 230 and RMT 230T.

Versions are also available with built-in thermometer and night set-back function.

Please refer to tables below for technical specifications and ordering codes.

Principle

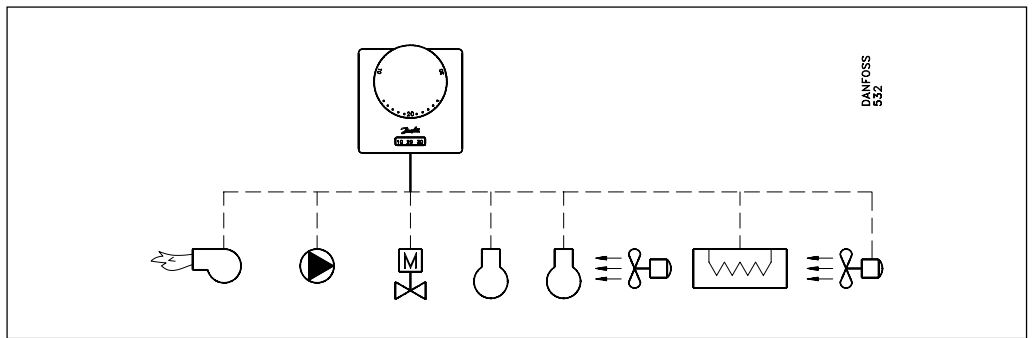

Ordering

No.	Type	Ordering Code	Description	Accelerator	Thermometer	Night Setback
1	RMT-230	087N1100	230V a.c.	Parallel	No	No
2	RMT-230 *	087N1110	230V a.c.	No	No	No
3	RMT-230T	087N1125	230V a.c.	Parallel	Yes	Yes
4	RMT-24	087N1196	24V a.c.	Parallel	No	No
5	RMT-24T	087N1197	24V a.c.	Parallel	Yes	Yes
6	RMT-24R ¹⁾	087N1195	24V a.c.	Parallel	No	Yes
		087N0099	Adaptor plate for flush mounting			


1) Only to be used with actuator ABN-NO

* No accelerator heater

Data

	RMT-24	RMT-230
Temperature Range °C	8 - 30	8 - 30
Contact Type	SPDT	SPDT
Contact Material	Ag	Ag
Contact Rating, Ohmic A a.c.	10	10
Contact Rating, Inductive cos φ = 0.6A a.c.	4	4
Contact Rating, Start Current A a.c.	24	24
Contact Rating, Ohmic A d.c.	1	
Contact Rating, Minimum mA a.c./mA d.c.	70	150
Thermal Deviation °K	< 2.5	< 2.5
Cut in Stability °K	< 0.5	< 0.5
Time Constant Vair = 0.15m/sec) min	< 14	< 14
Thermal Differential °K (with accelerator)	< 1.0	< 1.0
Storage Temperature Range	-20 - +50	-20 - +50
Working Temperature Range	-10 - +50	-10 - +50
Air Humidity % RH	40-60	40-60
Weight g	150	150
Protection Class	IP 20	IP 20

Electrical Connection

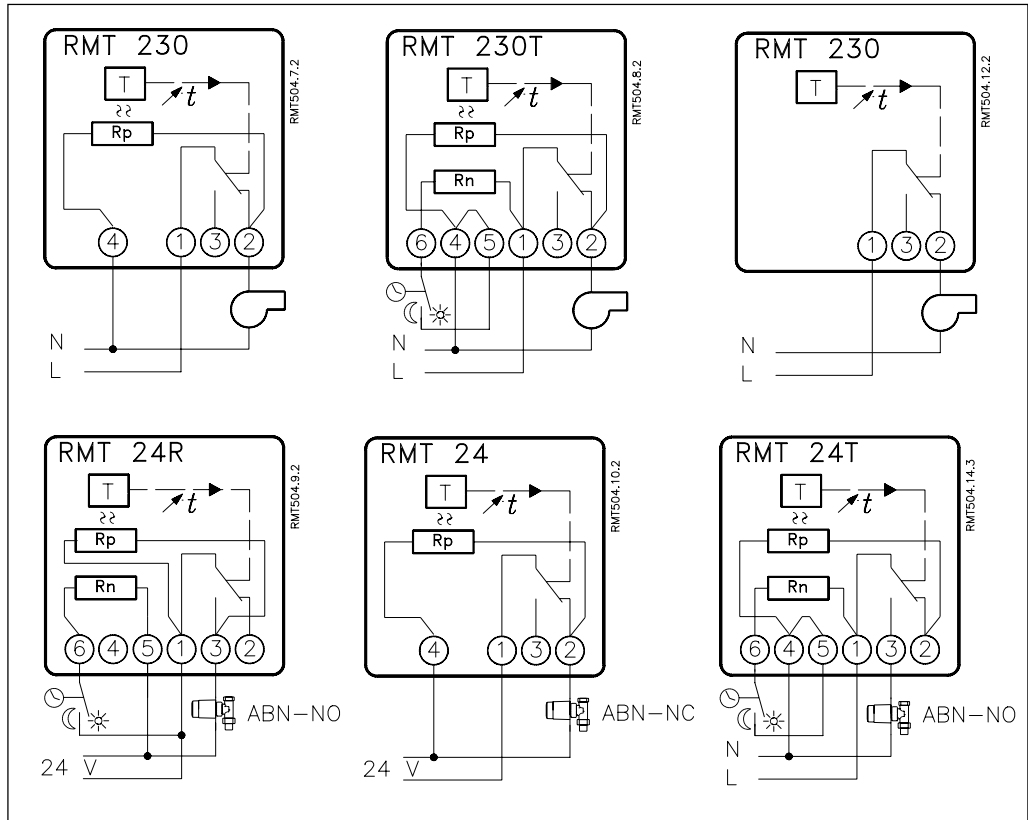

1 - 2 opens on increase in temperature

1 - 3 closes on increase in temperature

Dimensions

